

SERIES 212T

PUMP MATERIALS

Pump Body: Teflon hard coated aluminum
 Plunger: 304SS
 Seals: Proprietary Teflon blend
 Elastomers: Viton

SPECIFICATIONS


Flow: to 3.5 GPM
 Pressure: to 200 PSI
 Temperature: to 120°F
 RPM(max): 2400
 Inlet: 1/4 F NPT(2)
 Outlet: 1/4 F NPT(2)

Sprayer pump for applications up to 3.5 GPM, 200 PSI



PN	MODEL	GPM	PSI	NOZZLE	AMP	Weight (lbs.)
80130	212T-170/M20	2.22	50	'20	15.8	16
		2.18	85	'15	18.2	16
80037	212T-170/M21	2.34	50	'20	13.2	18
		2.18	85	'15	16.5	18
		Intermittent duty only	1.90	145	'10	23.7
80347	212T-170/M94	3.5	20	-	13.0	10
		3.4	30	'40	15.0	10
		Intermittent duty only	3.0	40	'30	17.0

New 12 Volt High Performance Sprayer Pump and Multi-function Control System

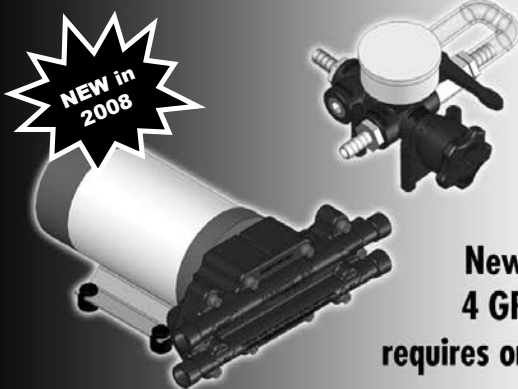

**New Series 314
 4 GPM, 100 PSI
 requires only 30 amps**

Sprayer upgrading has never been more simple or inexpensive.

Imagine the simplicity, bolt down the pump, bolt down the control and connect a hose between the two... "now that's simple."